



### Option 1. Supplying us your logo



black



1 Pantone colour




full colour

If you have chosen to have your greaseproof printed in **black**, **1 Pantone colour** or **full colour (CMYK)** you can supply us a high resolution file in any of the following formats.

.jpg .pdf .ai .eps .tif

### IMPORTANT - 2 colour print

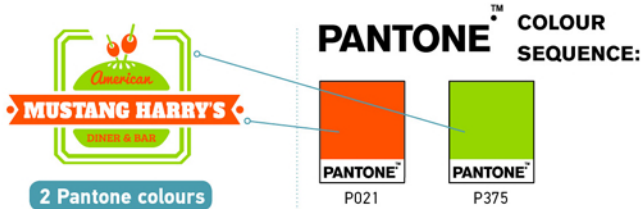


If you have chosen to have your greaseproof printed in **two colours** then we only accept '.ai' files or a vector based '.pdf' - need advice, just give us a ring.

**x2 Pantone solid spot references** should be indicated within the file - all fonts must be outlined and images embedded @300dpi.

.ai .pdf (vector based)

### Option 2. Supplying us your final artwork

If you have your artwork already laid out and have chosen to have it printed in **black**, **1 Pantone color** or **full color (CMYK)** you should supply us a 'High resolution PDF' please ensure all fonts are outlined and any images embedded @300dpi. PDF files should be setup at the required greaseproof sheet size and include an additional 3mm of bleed on each edge for trimming purposes.

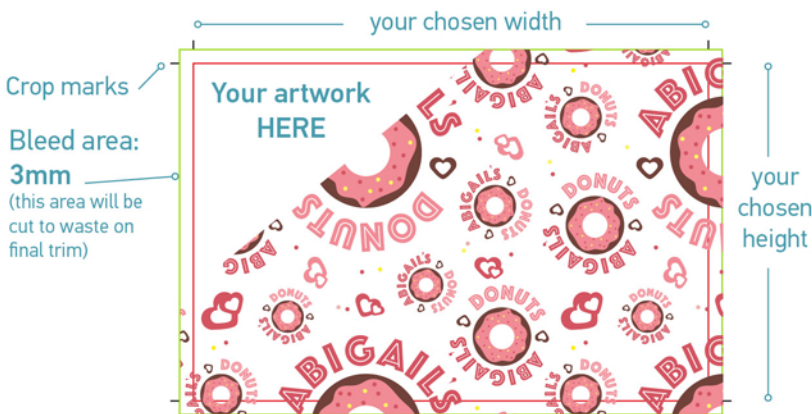

If you are supplying us final artwork and have chosen to have it printed in **2 Pantone colors** please supply as above a 'High resolution PDF' but note that we only accept '.ai' files or a vector based '.pdf' (a native Adobe Illustrator file) and **x2 Pantone solid spot references** should be indicated within the file.

1. We will check over your supplied artwork.
2. We will email a **pdf proof** back to you for your final approval.
3. On your **approval** of the pdf proof we will print your paper.

